

Prior Art

Fig. 1

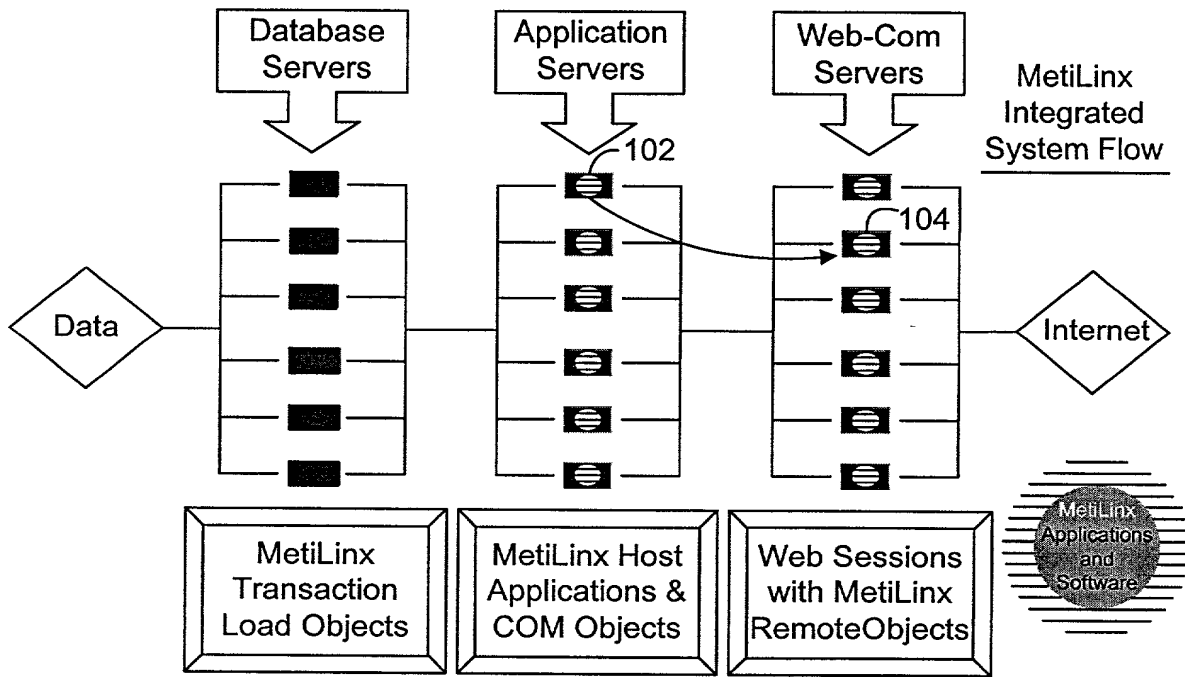


Fig. 2A

# MetiLinX Enterprise 2.0 Architectural Components

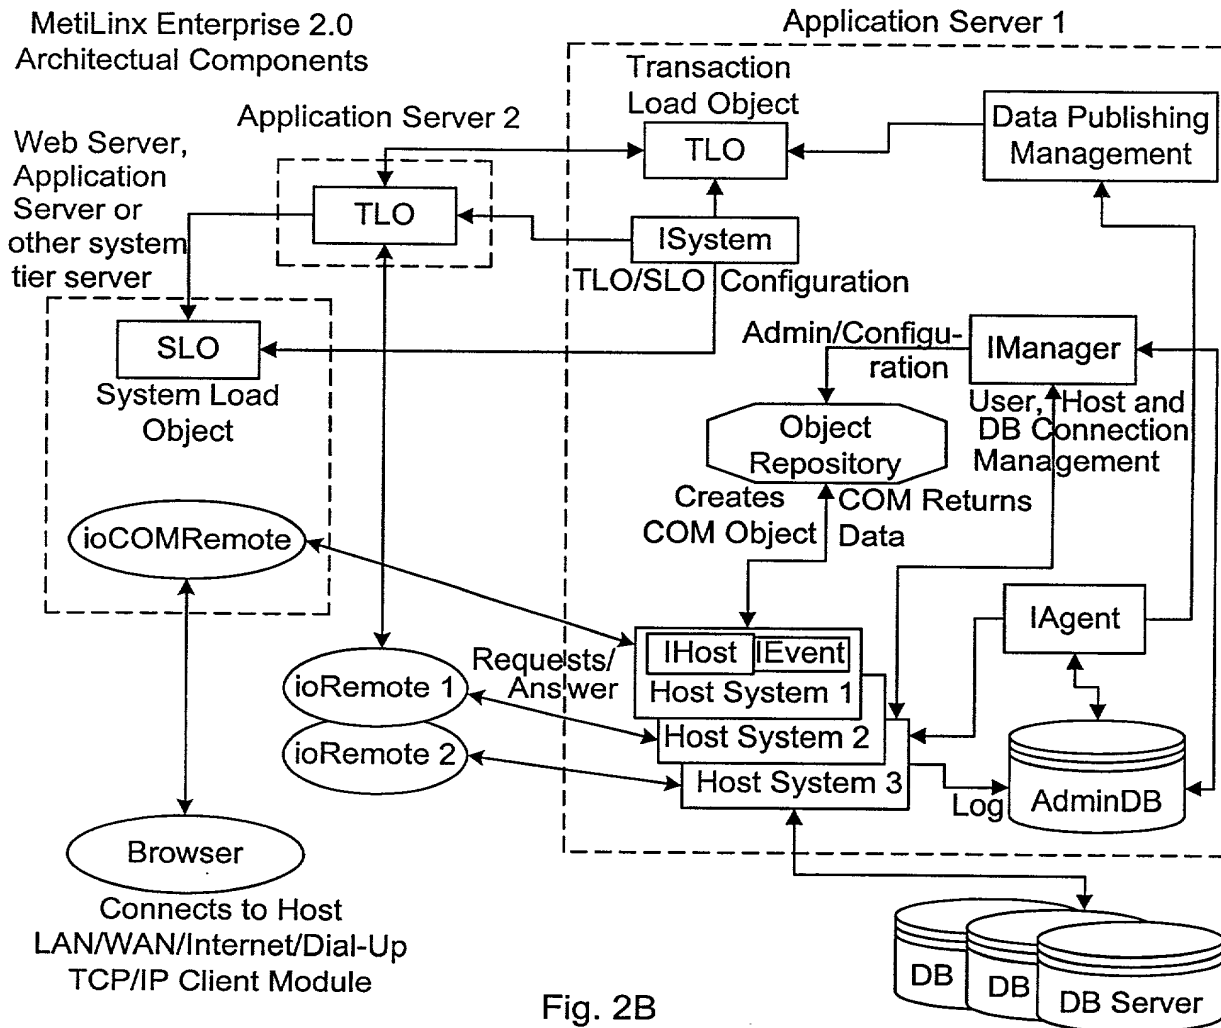


Fig. 2B

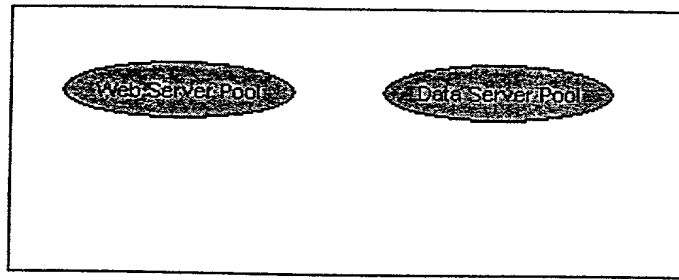


Fig. 3A

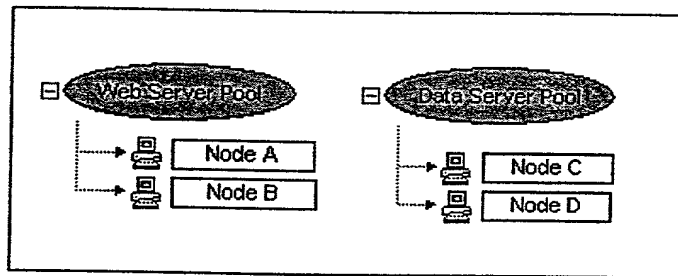


Fig. 3B




Fig. 3C

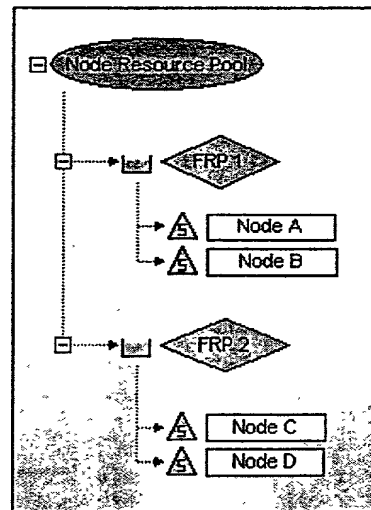


Fig. 3D

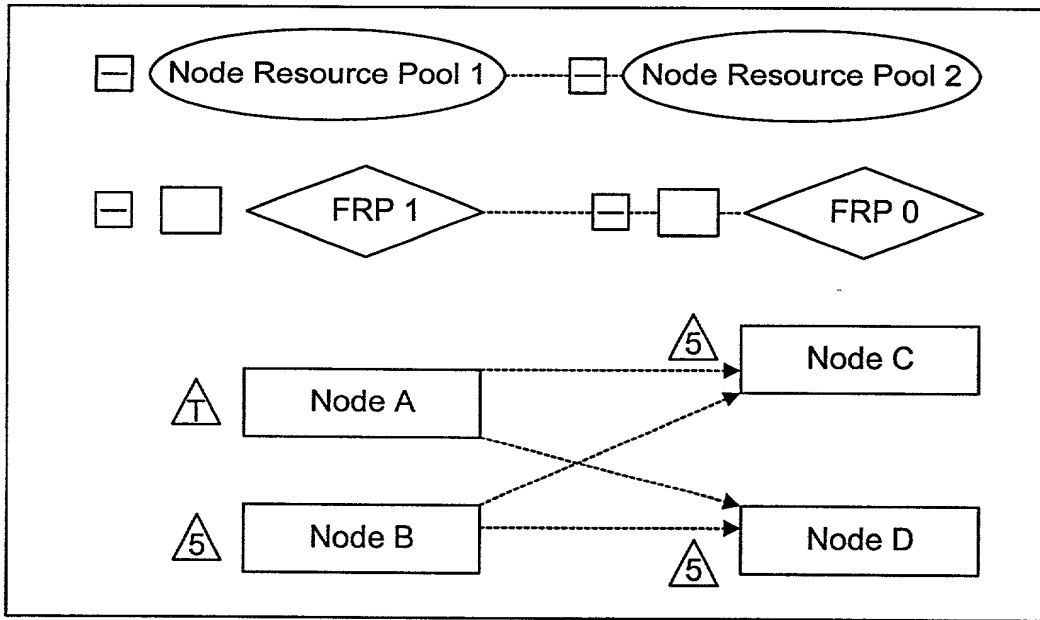


Fig. 3E

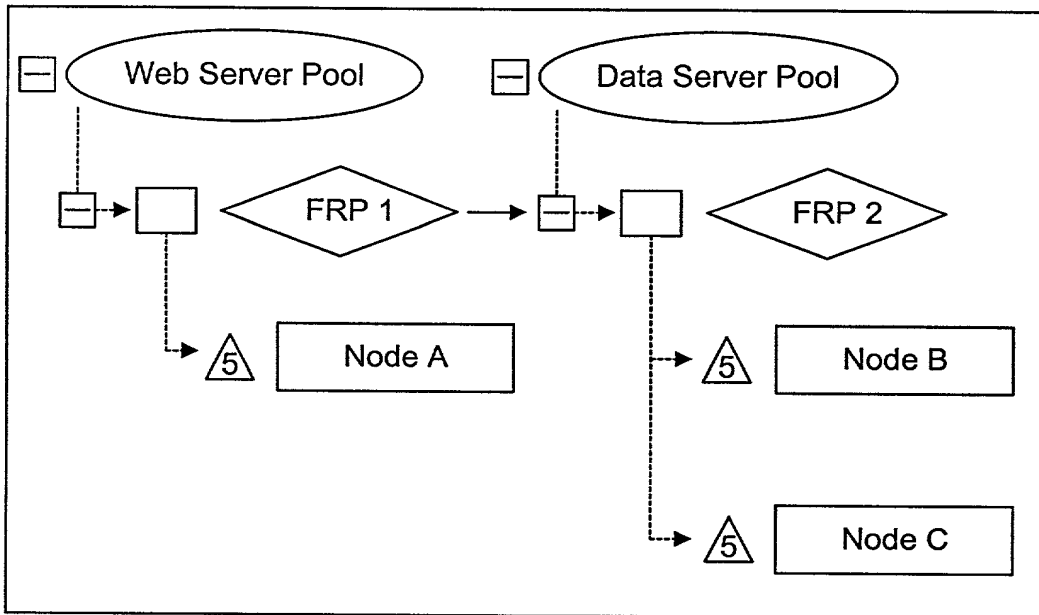


Fig. 3F

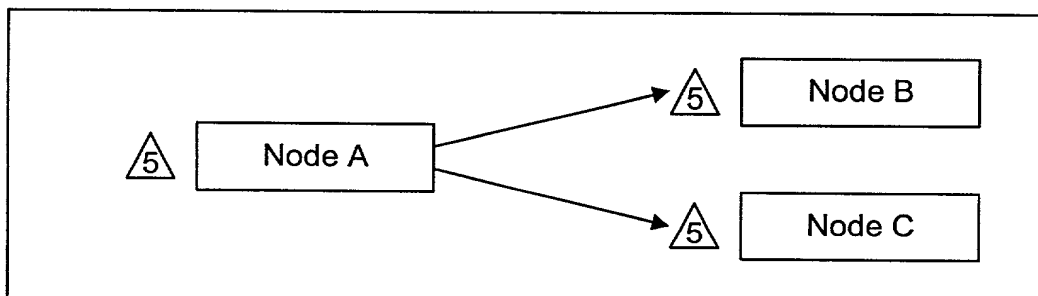


Fig. 3G

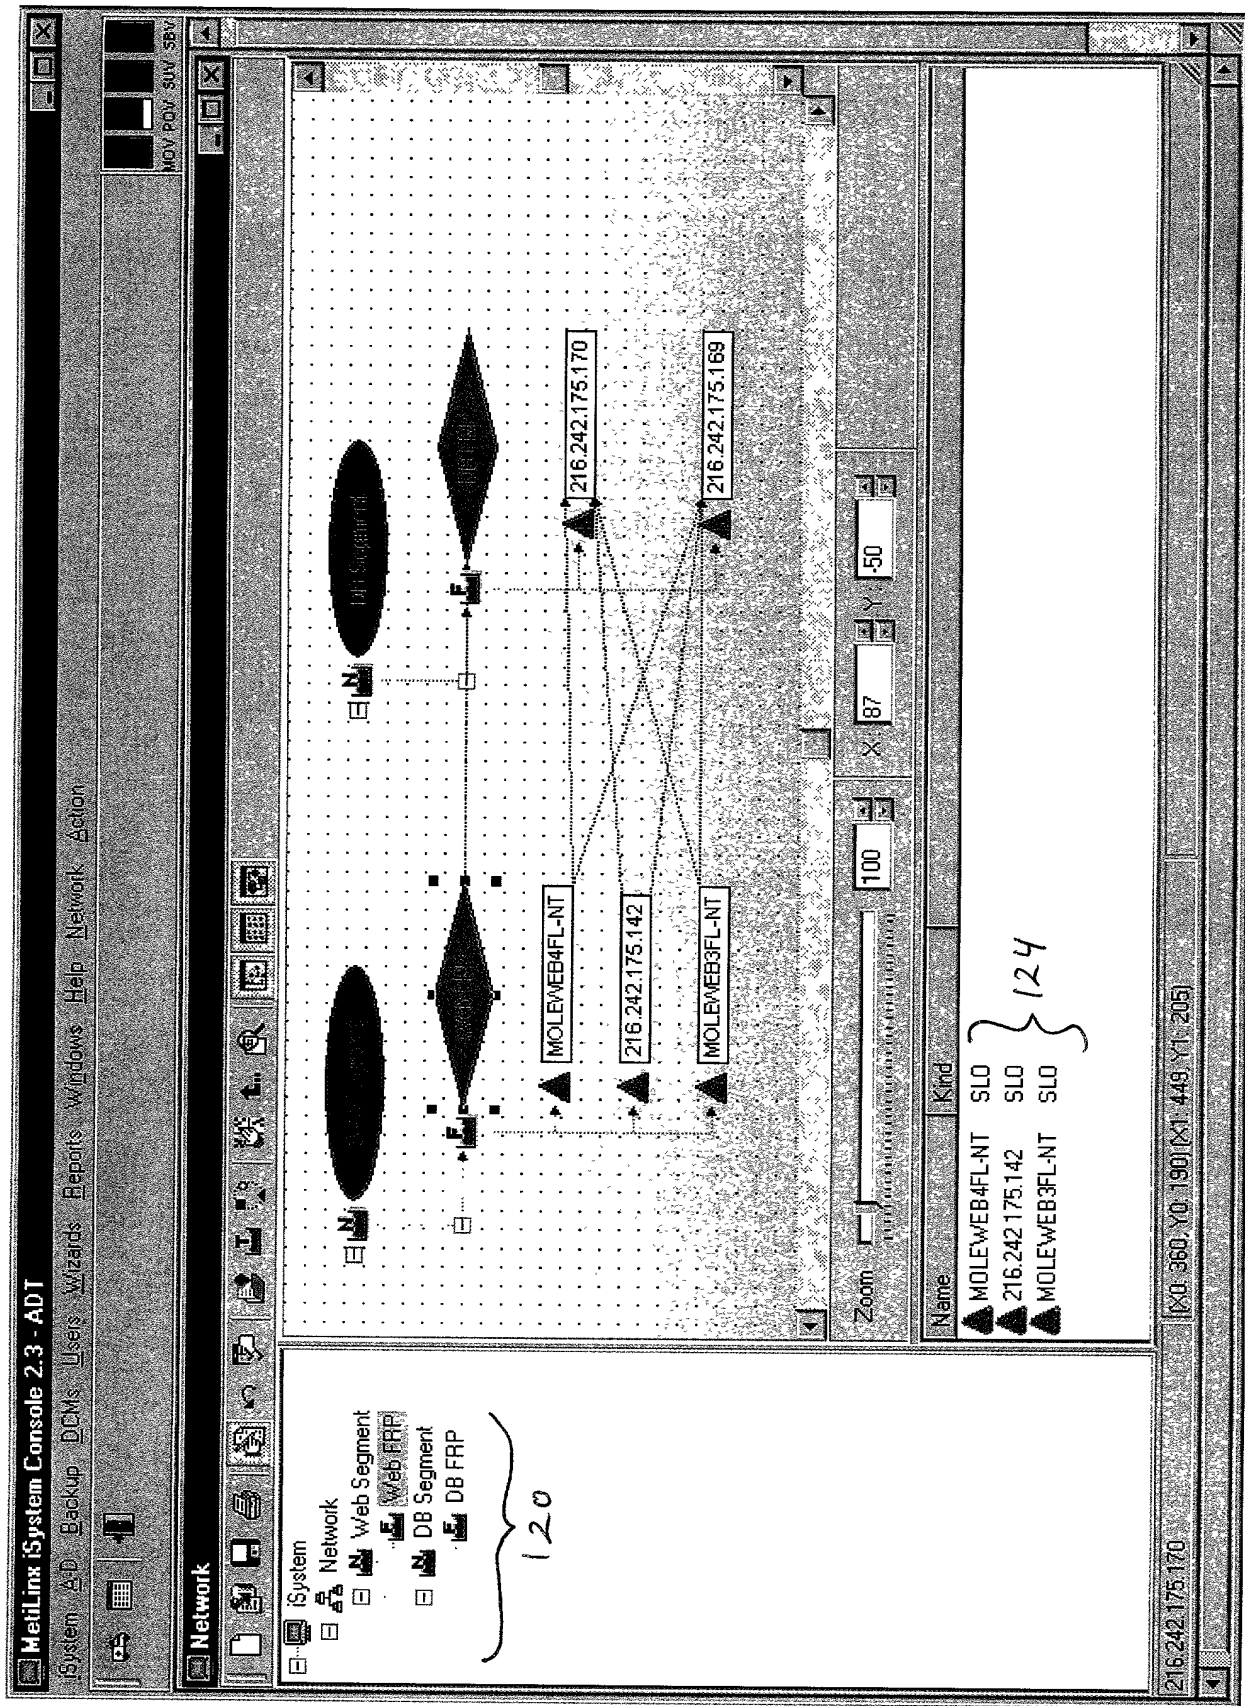


Fig-3H

MetiLinX iSystem Enterprise 2.2

iSystem
Subnetwork
Users
Refresh
Backup/Restore
Wizards
Statistics
Log Off
a
Help

Node Listing
Graphic View
Monitor
History Monitor

Name	Kind	Alias	Latency	Enabled	Running
192.168. 	Plain Computer	AMESA2-FL	30	Yes	
192.168. 	Plain Computer	FGONGORA-2-FL	30	Yes	
192.168. 	Plain Computer	GUSTAVO-1-FL	30	Yes	
192.168. 	Plain Computer	GUSTAVO-2-FL	30	Yes	
192.168. 	SLO	METILINX-2-F	30	Yes	No
192.168. 	Plain Computer	METILINXTEST...	30	Yes	
192.168. 	SLO	192.168.2.14	30	Yes	Yes
192.168. 	SLO	RSANCHEZ-1-FL	30	Yes	Yes

User A
PCiSystem: 192.168.2.83
Monitor File:

Fig. 4A

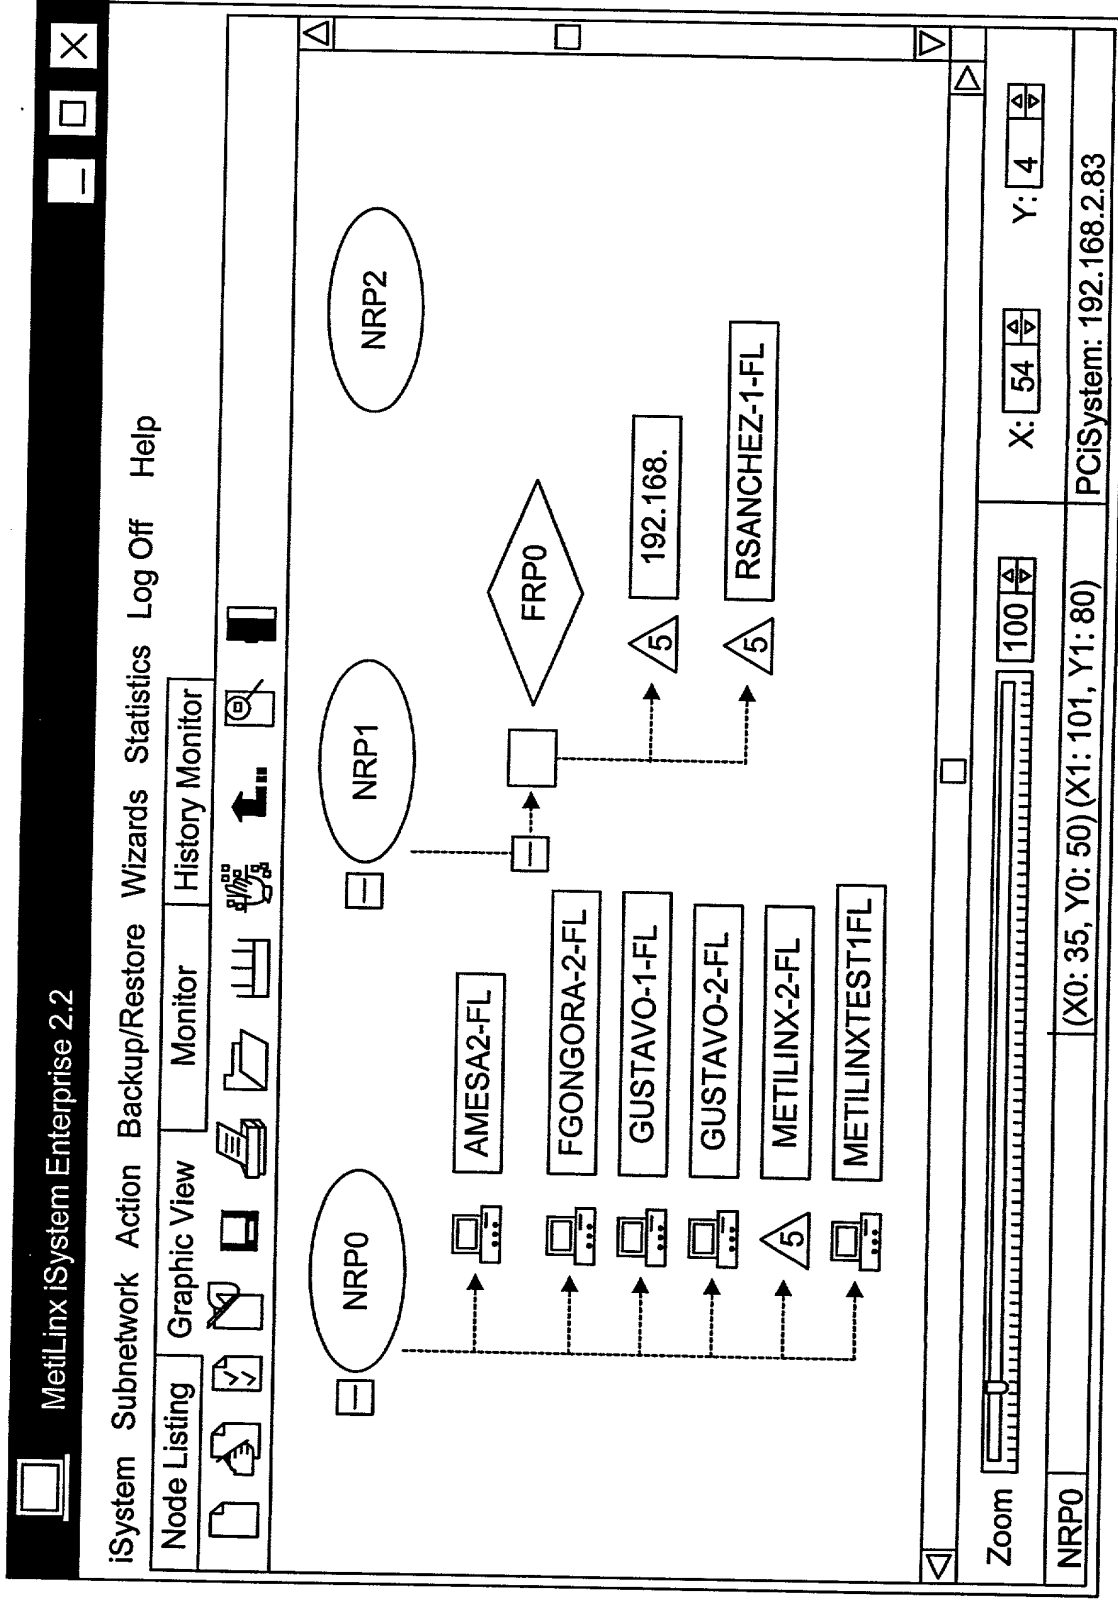


Fig. 4B

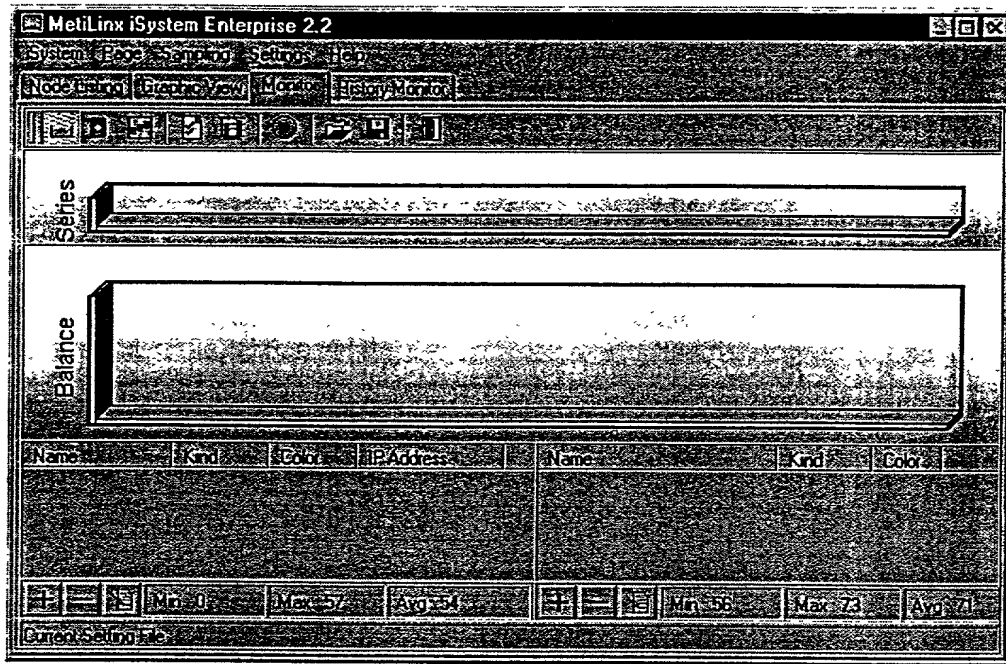


Fig. 4C



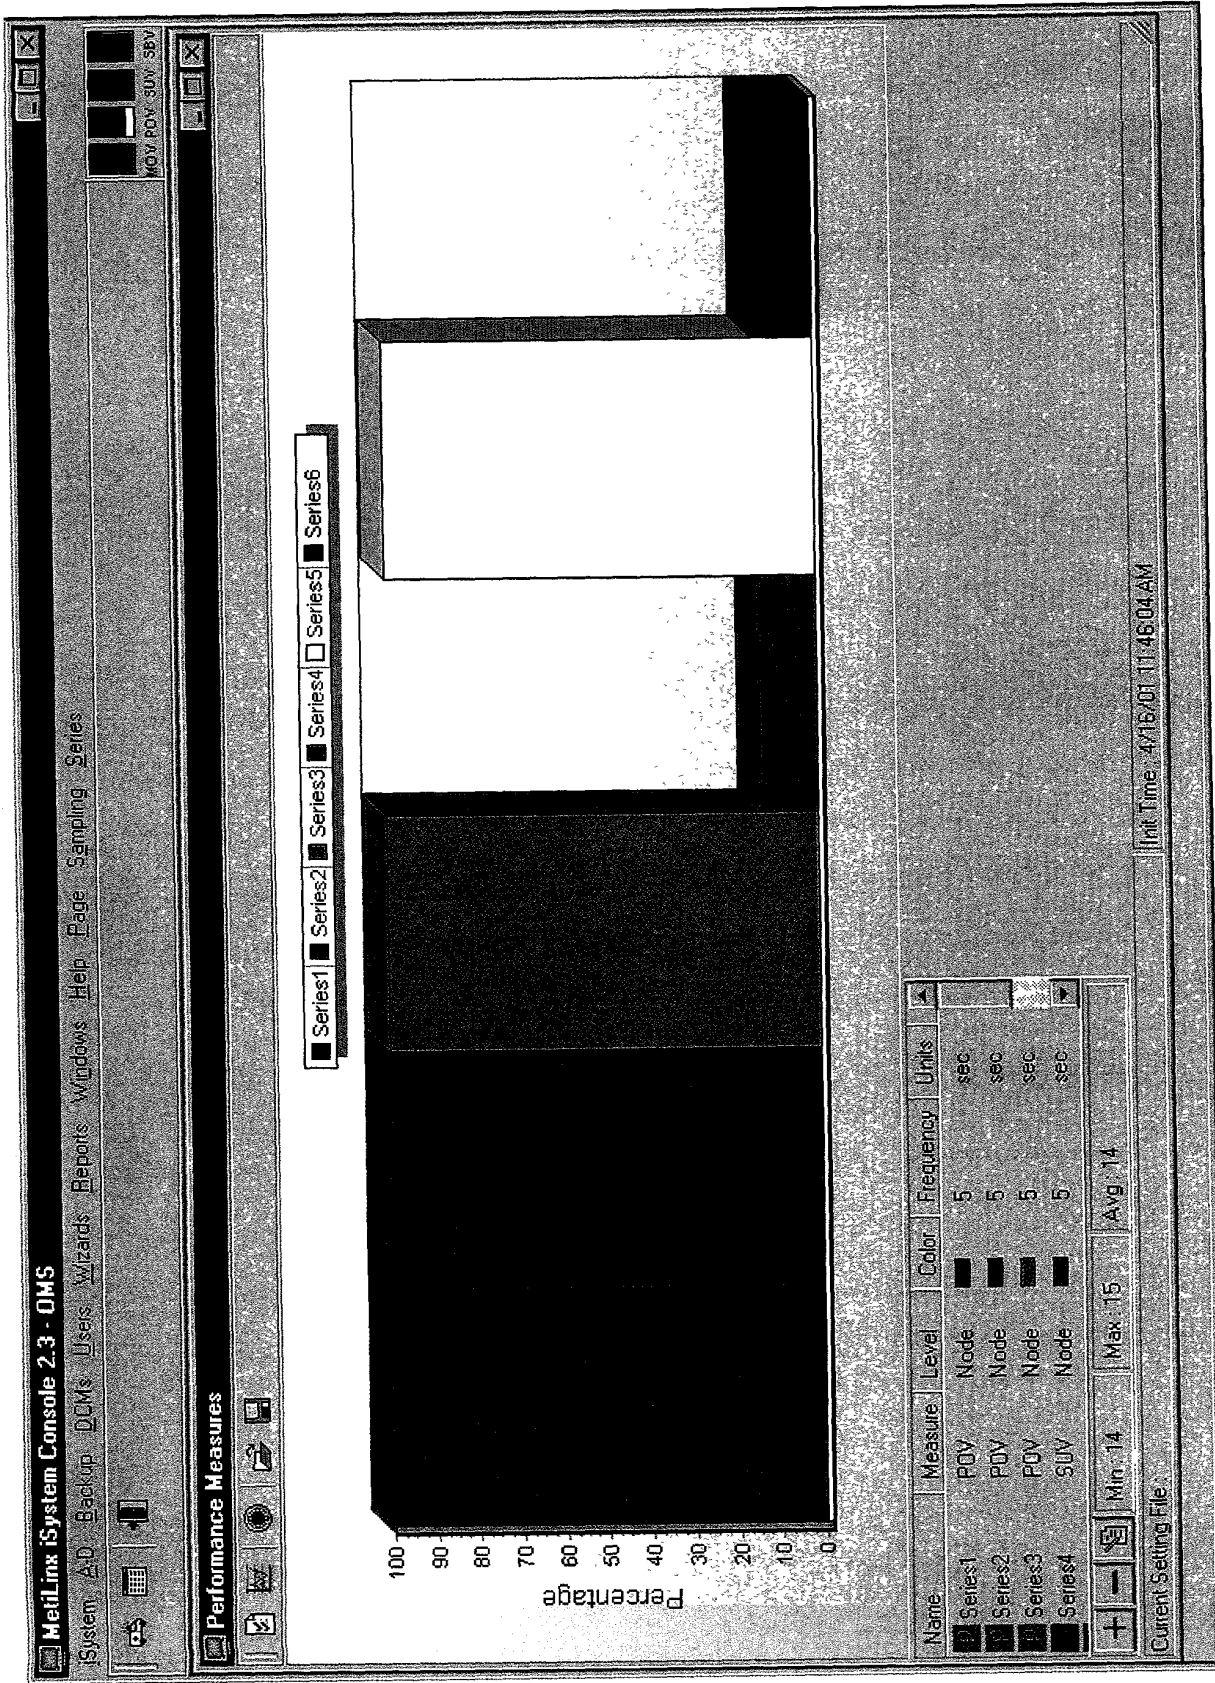


Fig. 4D

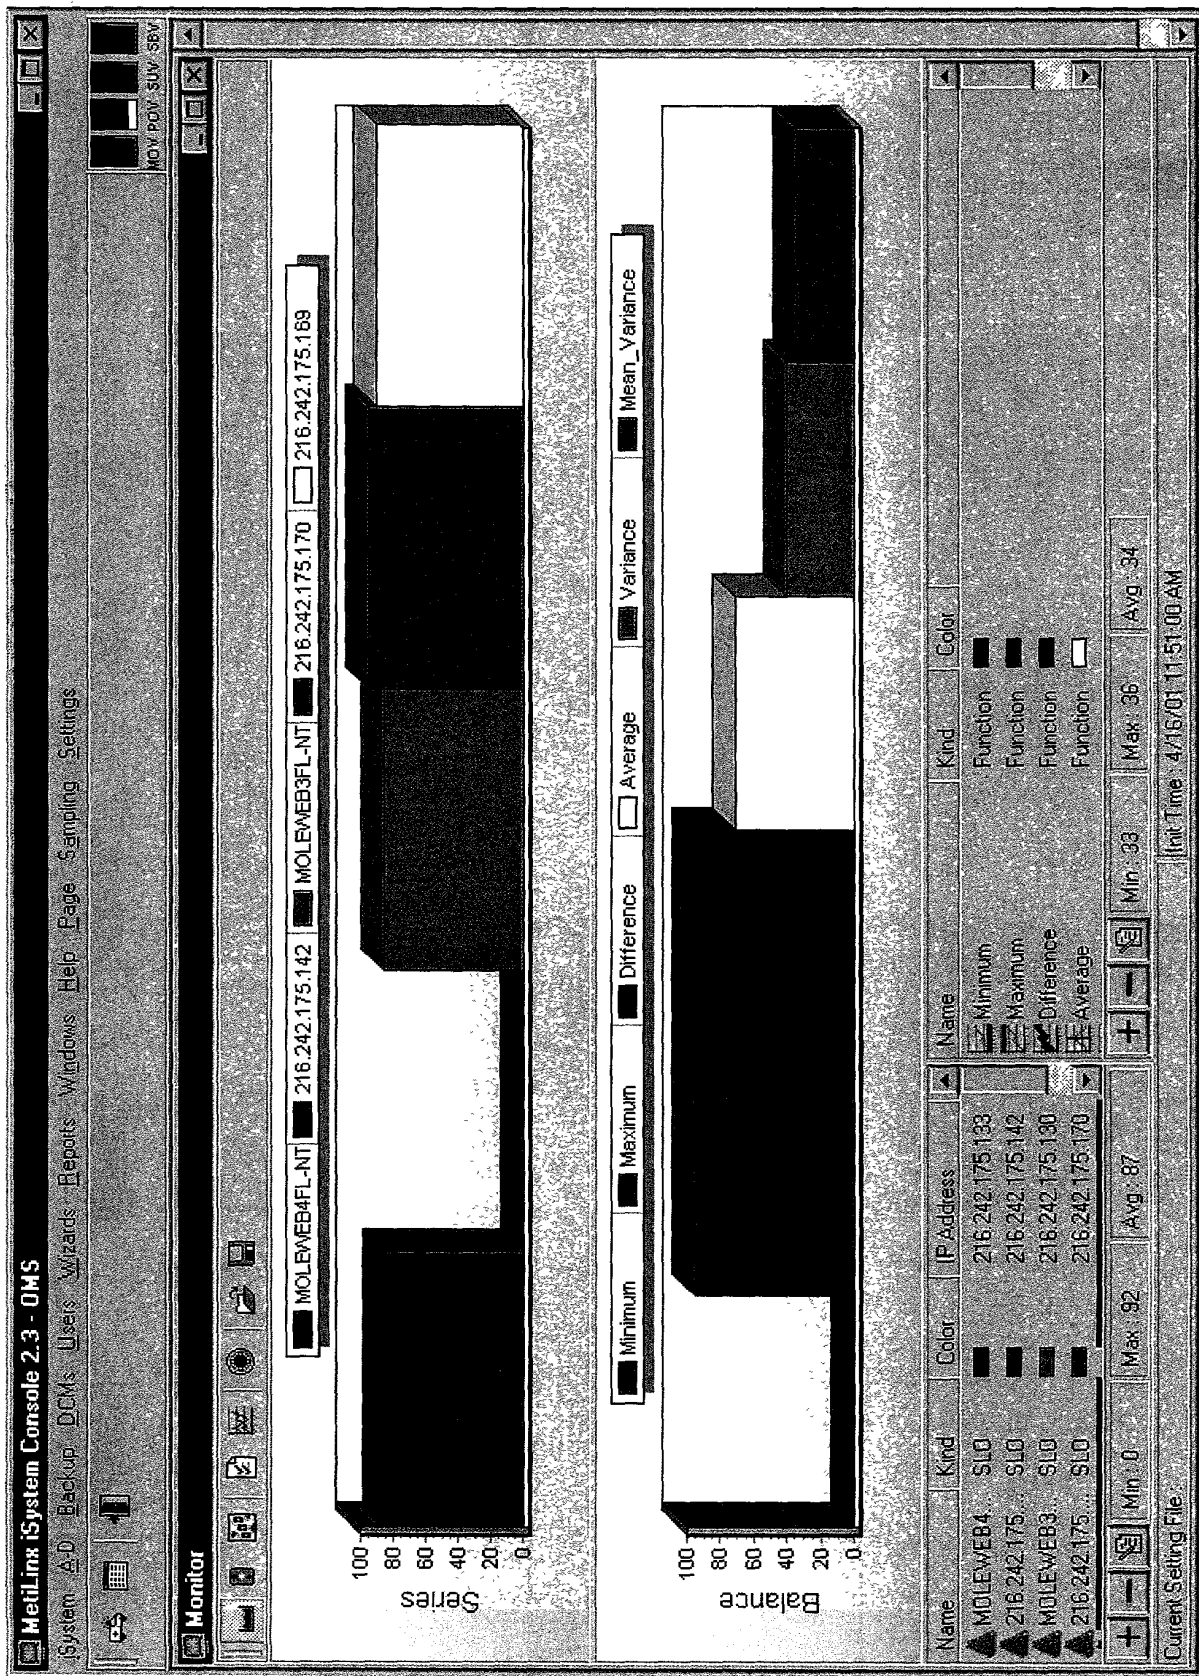


Fig. 4E

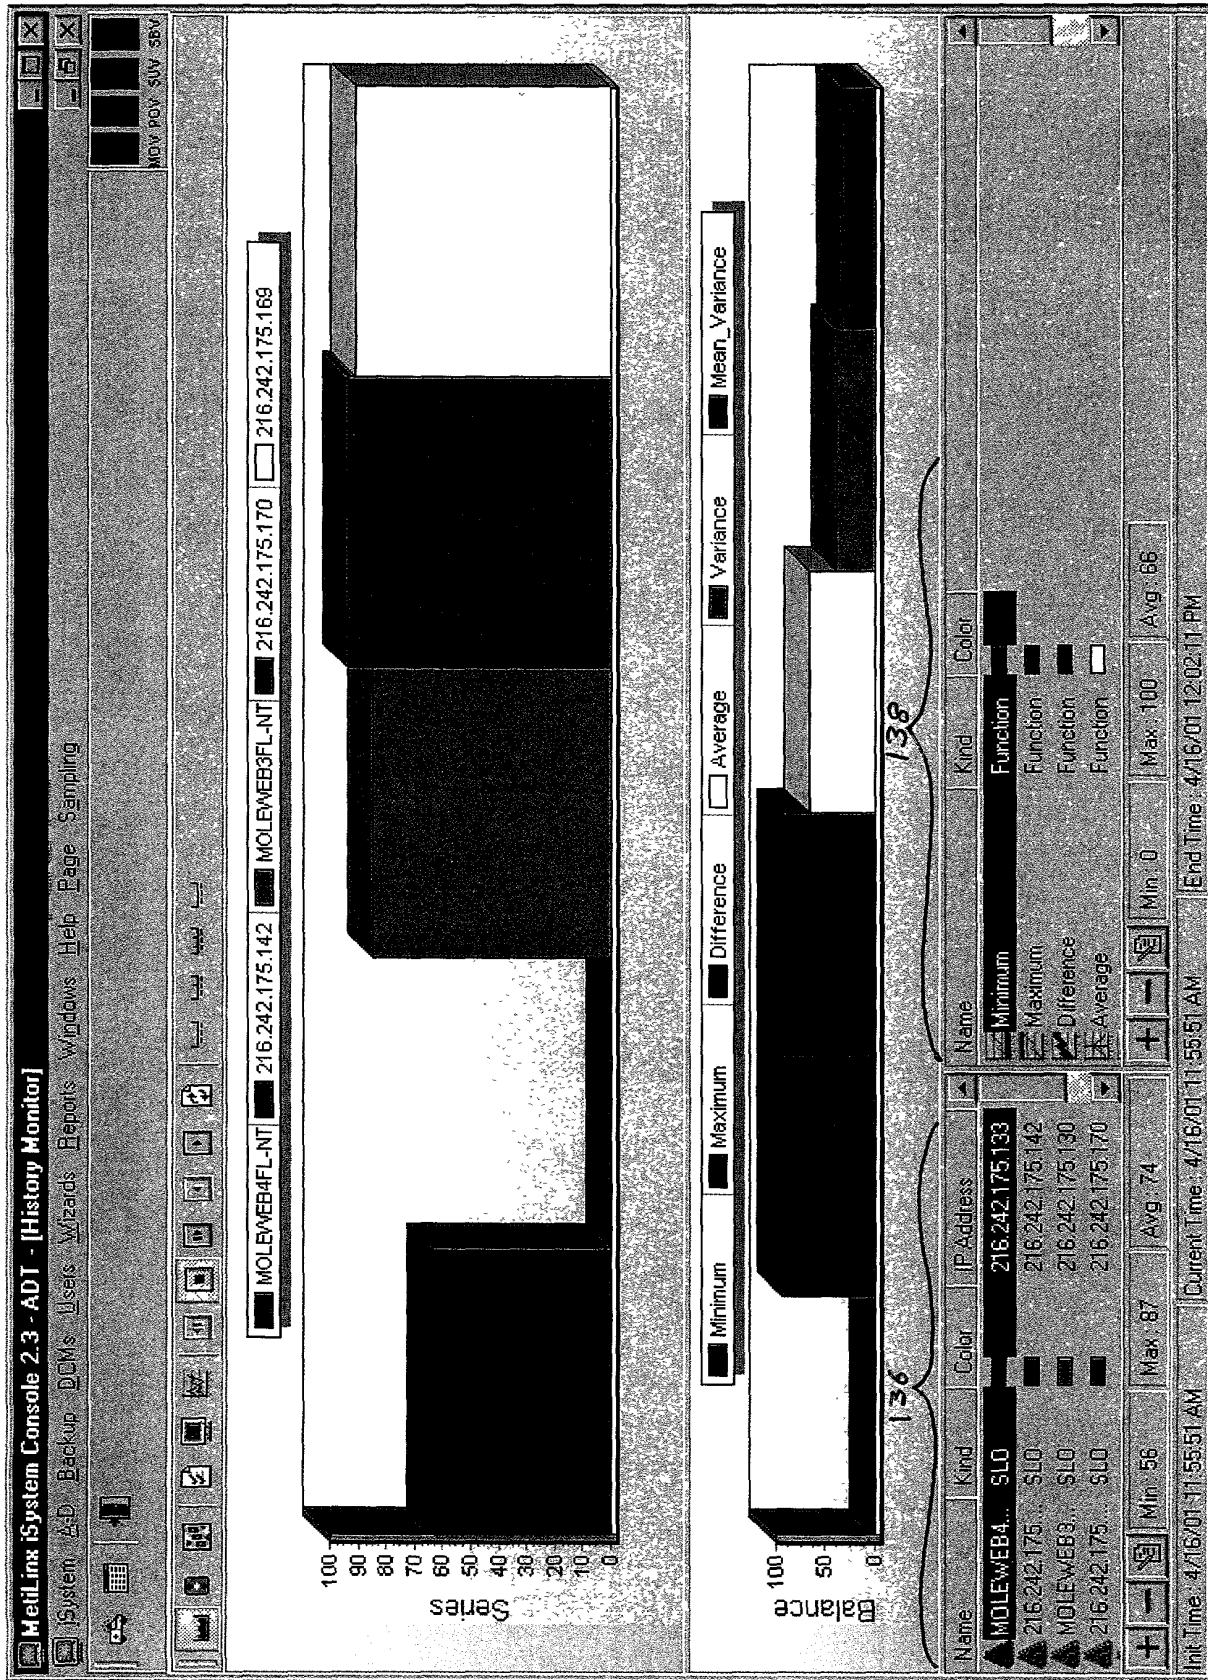


Fig. 4F

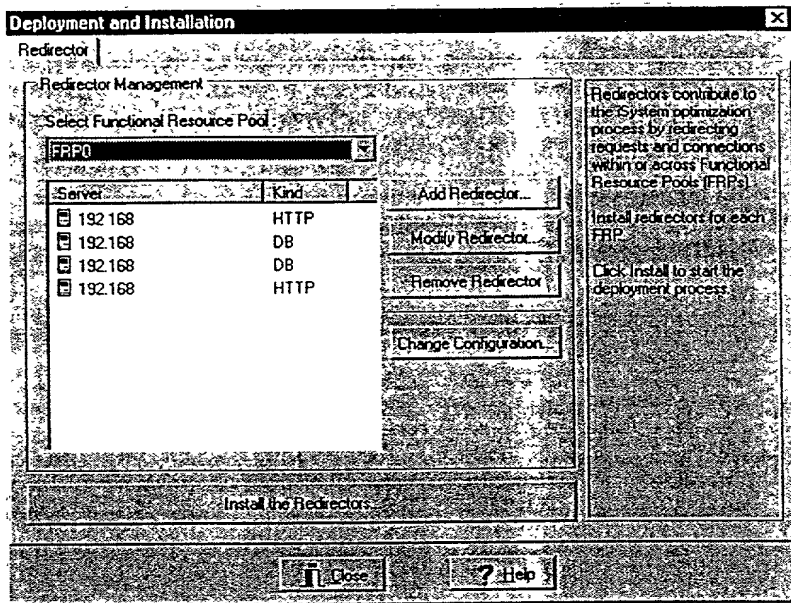


Fig. 5A

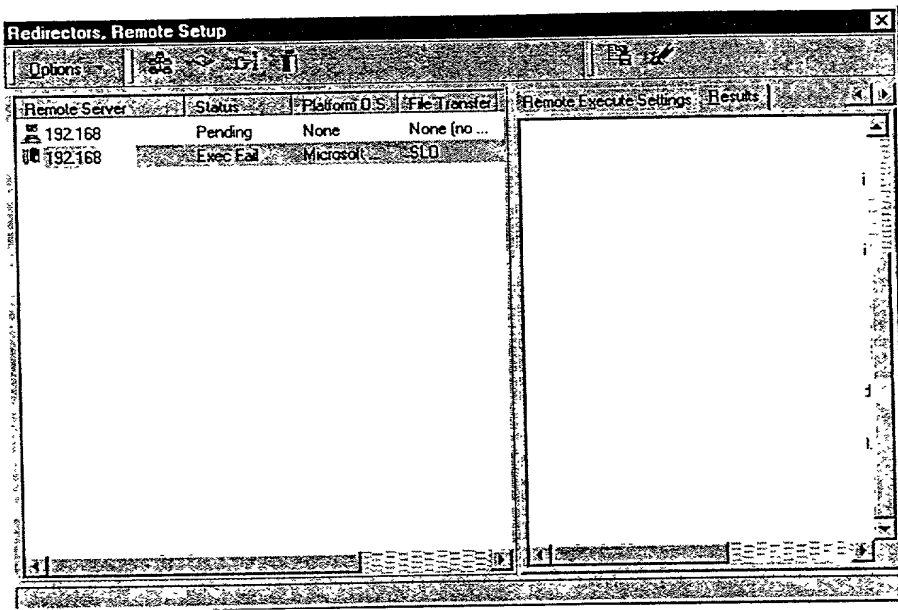


Fig. 5B



General Settings | File Transfer Settings | Results

FTP User

☒ Anonymous

☐ FTP Username:

                    Password:

                    Confirm Password:

Destination Folder

☒ Default (FTP Home Directory)

☐ Use following folder:

Fig. 5C

General Settings | File Transfer Settings | Results

Destination Folder

☒ Default (Remote SLD Folder)

☐ Use following remote folder:

Fig. 5D

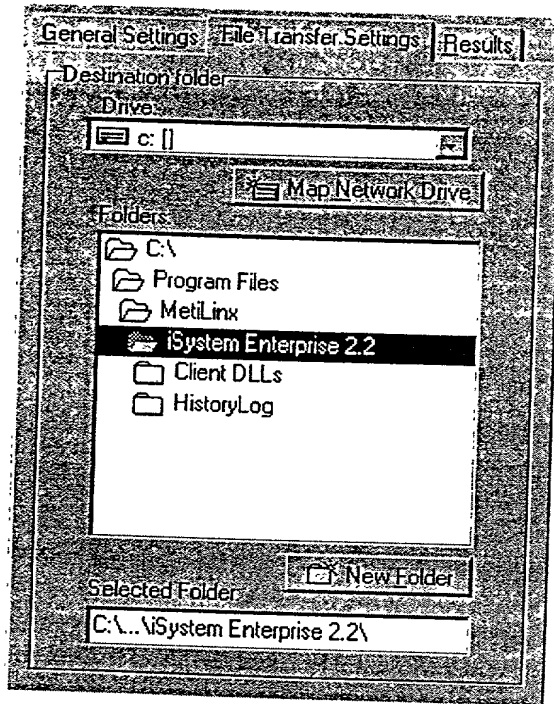


Fig. 5E

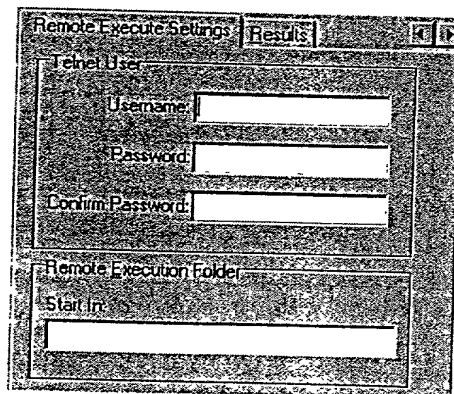


Fig. 5F

### HTTP Redirector Configuration

**Redirector Listening Port**

Port No.:

**Functional Resource Pool**

SLD Address:

**Server Selection Method**

☐ Best statistics

☒ Round robin

**Web Servers**

Server Address	Port	Statistic
192.168.	80	0

Fig. 5G

**OLE DB Redirector Configuration**

Functional Resource Pool

SID Address:

Server Selection Method

☒ Best statistics ☐ Round robin

Database Server Connections

DB:Server	OLE DB

Fig. 5H



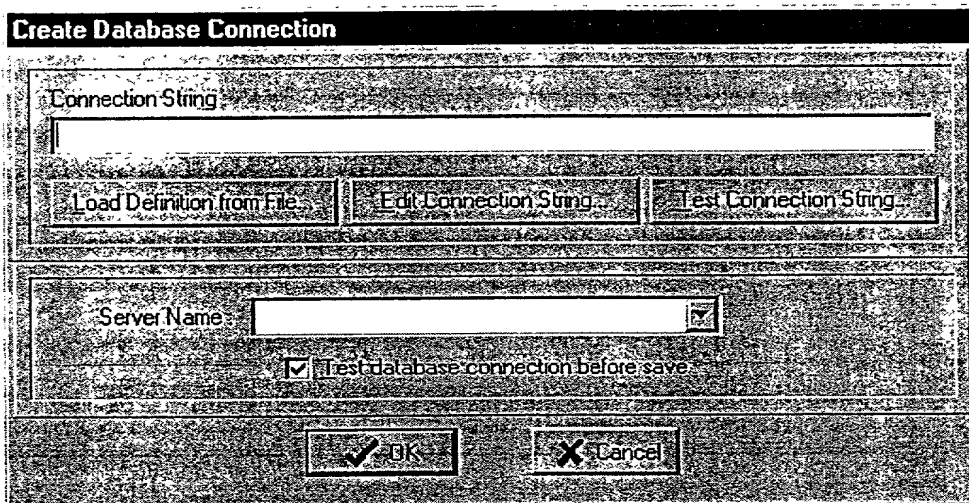


Fig. 5I

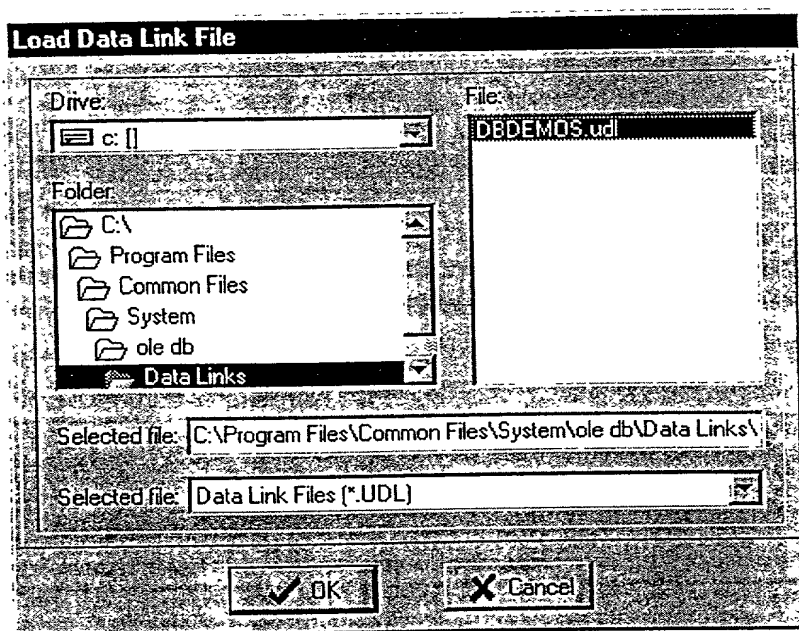


Fig. 5J

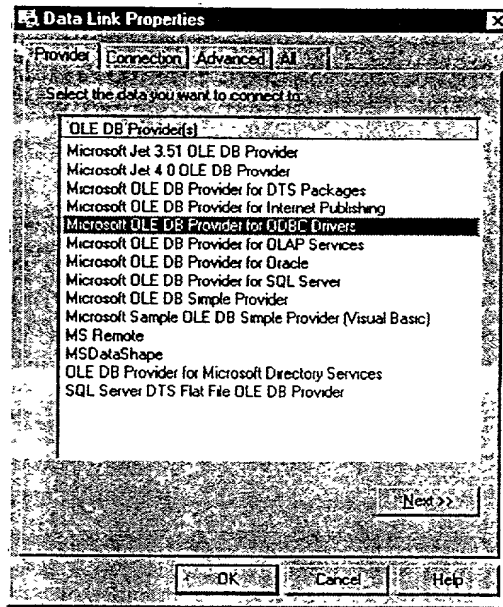


Fig. SK

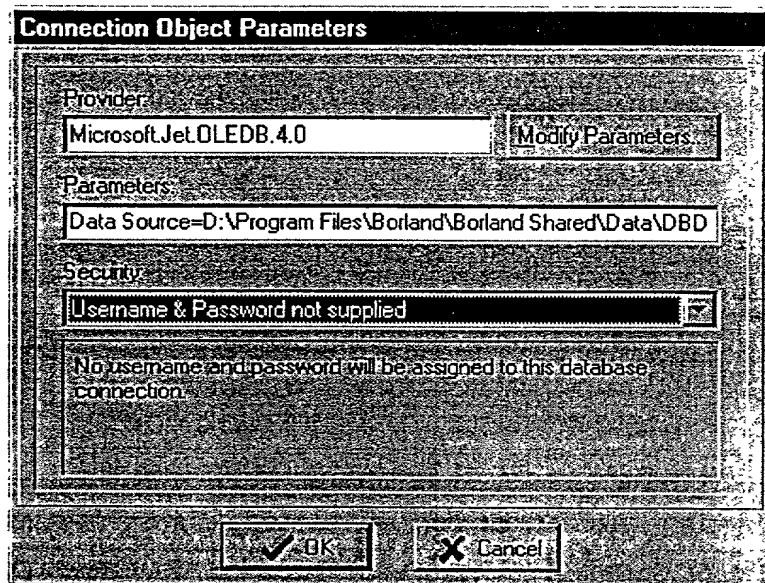


Fig. SL

**Connection Object Parameters**

Provider:

Parameters:

Security:

Unless specified otherwise at connection time, the following username and password will be used:

User Name:  Password:

Fig. 5m

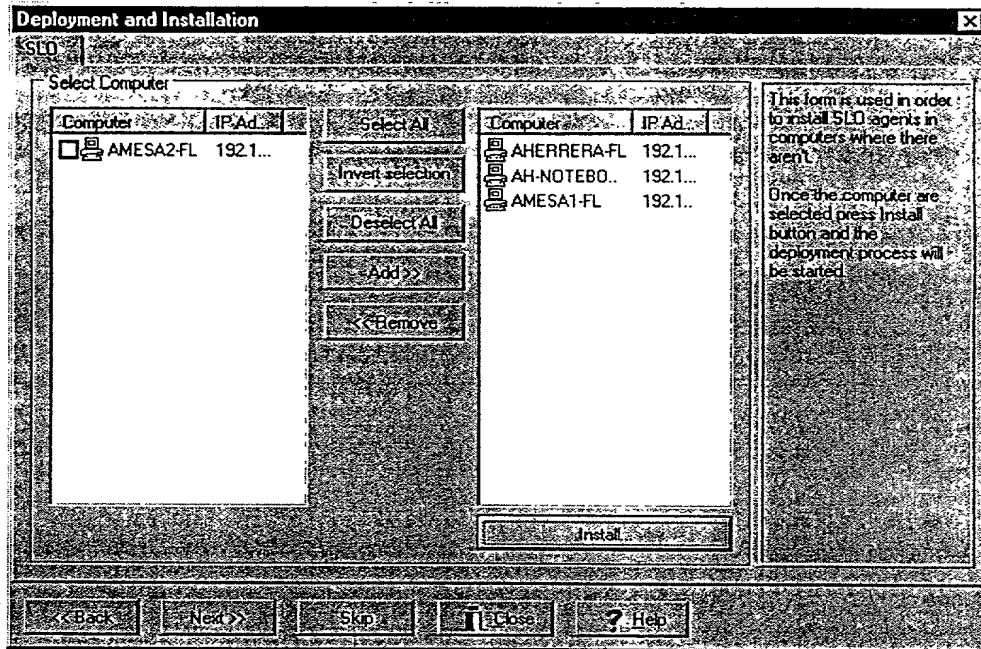


Fig. 5N

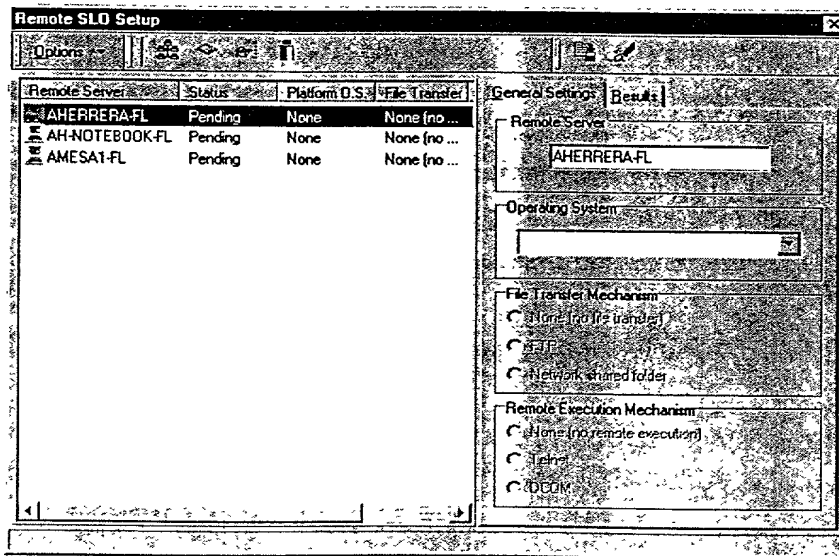


Fig. 5O

General Settings | File Transfer Settings | Results

FTP User:

☒ Anonymous

☐ FTP Username:

                    Password:

                    Confirm Password:

---

Destination Folder:

☒ Default (FTP Home Directory)

☐ Use following folder:

Fig. 5P

General Settings | File Transfer Settings | Results

Destination folder:

Drive:

Folders:

- ☐ C:\
- ☐ Program Files
- ☐ MetLink
- ☒ iSystem Enterprise 2.2
- ☐ Client DLLs
- ☐ HistoryLog

Selected Folder:

Fig. 5Q

Remote Execute Settings Results

Telnet User

Username:

Password:

Confirm Password:

Remote Execution Folder

Start In:

Fig. 5R

General Settings Remote Execute Settings

DCOM User

☒ Current user

☐ Interactive User (currently logged on)

☐ This user

Domain name:

Username:

Password:

Remote Execution Folder

Local path in remote computer:

Fig. 5S